

ELTRON ELECTRONIC INDIA

underwater lights

SMART
ENERGY
SAVING &
HIGH LUMENS



FOUNDER

Founded in the Year 1999 by
Mr. Mukesh Verma

68



CUSTOMIZATION

We can customize lights according to
your requirement




EXPERTS





Experts in creating innovative lighting
solutions





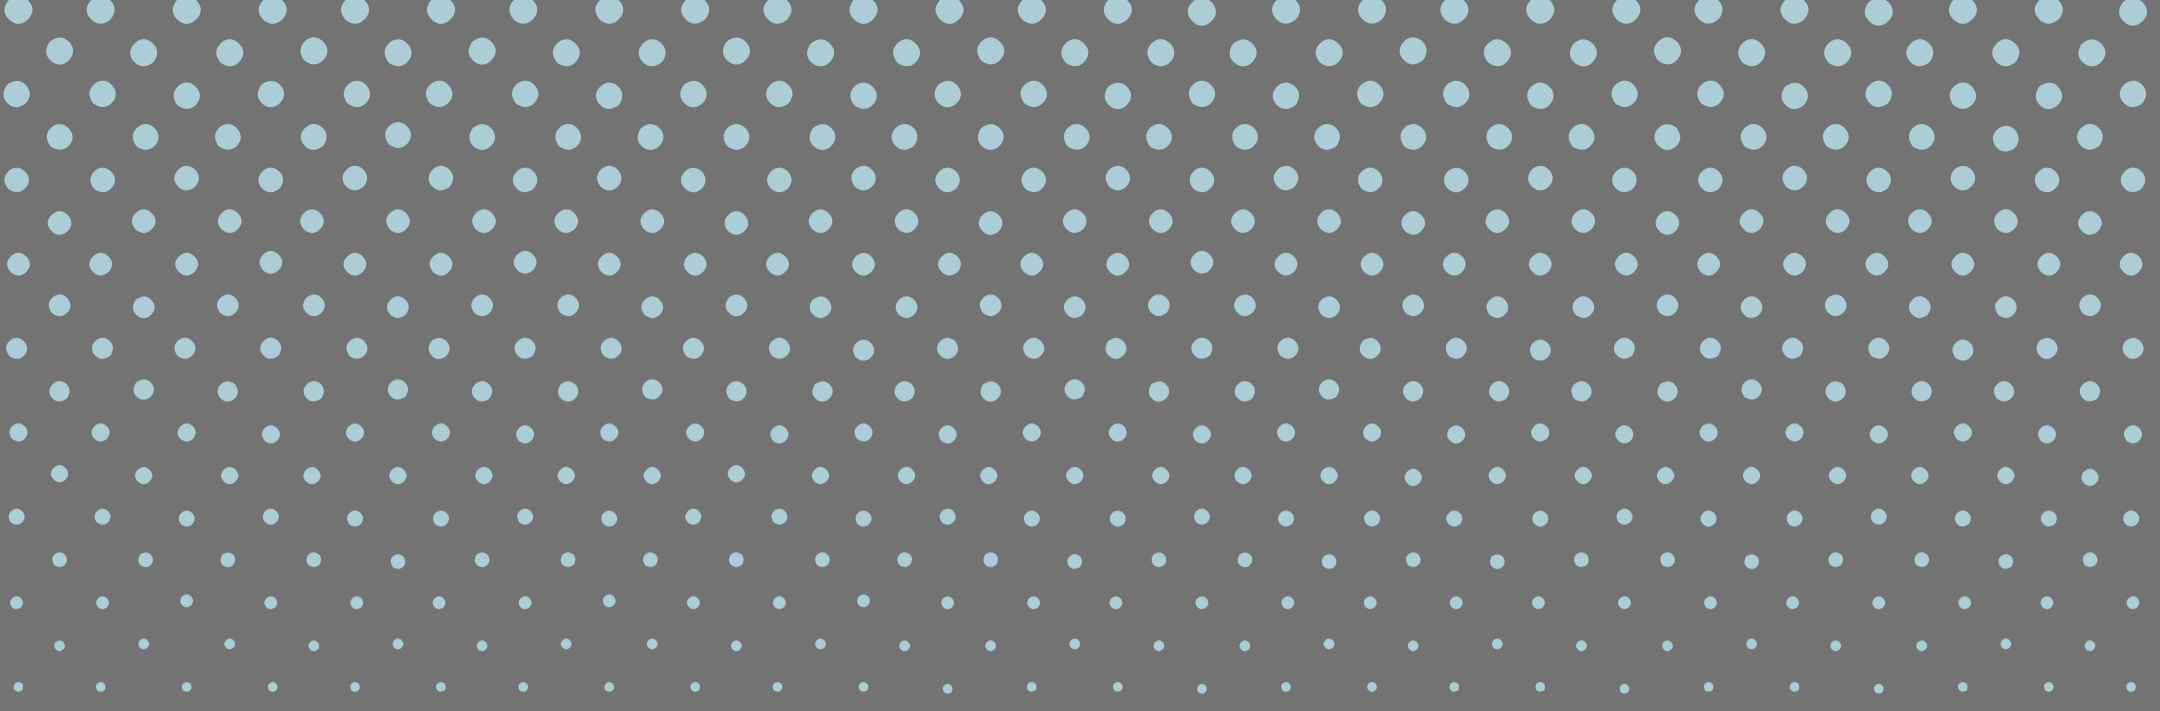

QUALITY

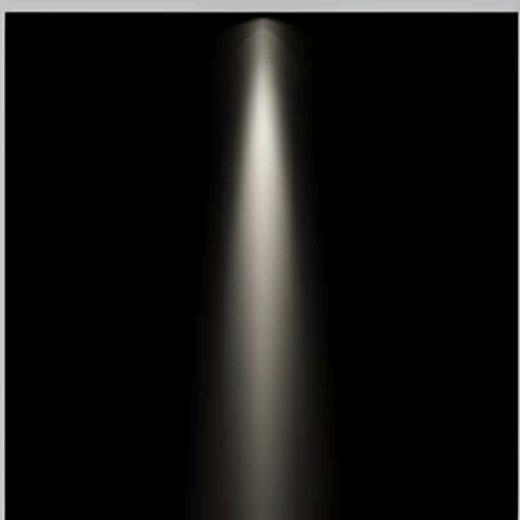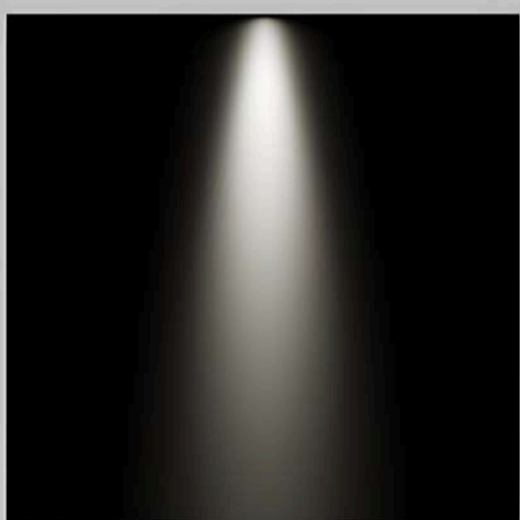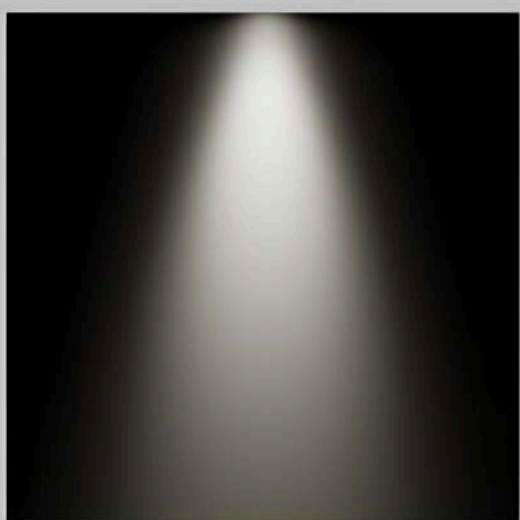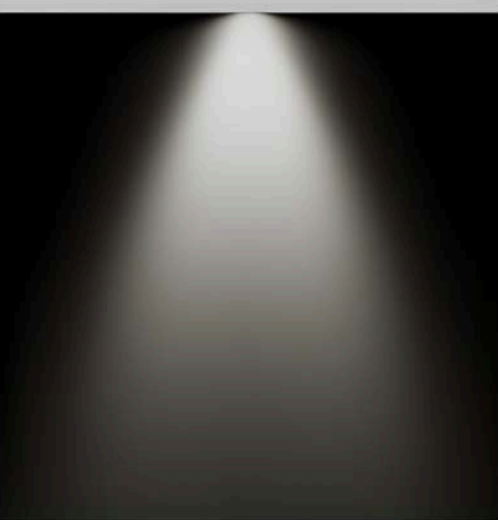Superior quality and durability
guaranteed.



 <p>Narrow Spot 6° DDR=0.1</p> <p>1/10</p>	 <p>Spot 14° DDR=0.25</p> <p>1/4</p>	 <p>Flood 28° DDR=0.5</p> <p>1/2</p>	 <p>Wide Flood 53° DDR=1</p> <p>1</p>
---	--	---	---


 <p>5000K 25 Degree Beam</p>	 <p>4000K 36 Degree Beam</p>	 <p>3000K 36 Degree Beam</p>	 <p>2700K 25 Degree Beam</p>
--	---	--	---

5000K

4000K

3000K

2700K

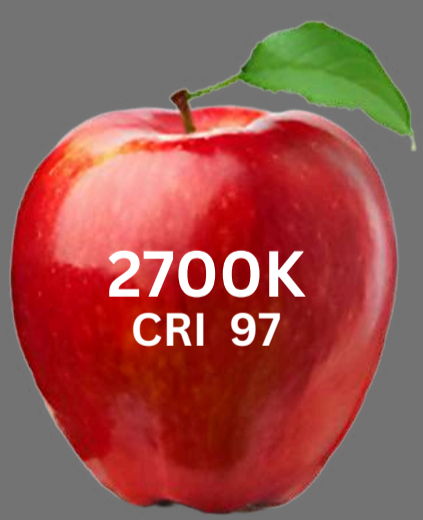

SOLIDS

Protected against a solid object greater than 2.5mm

3

Protected against a solid object greater than 1mm

4

Protected against dust limited ingress but not harmful

5

Dust tight-No ingress of dust-Two to eight hours

6



LIQUIDS

2

Resists splashes

3

Resists light rain

4

Resists heavy rain

5

Resists low pressure jets of water

6

Resists very short periods in water

7

Resists immersion in water for 30 minutes at 1 meter

8

Resists periods of immersion under water

IP rating, or ingress protection rating, signifies a device's resistance against solid objects and moisture. Consisting of two digits, the first one indicates the level of defense from solids, while the second denotes the degree of protection from liquids. Higher IP ratings such as IP68 ensure optimal durability and robustness in challenging environments, making them ideal for outdoor activities or industrial usage.

INDEX

SURFACE MOUNTED



7" SURFACE 20W
Pg. 1



7" SURFACE SS 20W
Pg. 2



4" SURFACE SS10W
Pg. 3



4" SURFACE 10W
Pg. 4



SURFACE 3W
Pg. 5



10" SURFACE SS60W
Pg. 6



10" SURFACE SS36W
Pg. 7



10" SURFACE 36W
Pg. 8

GROUND BURIAL AND U-CLAMP



GROUND BURIAL 3W
Pg. 9



GROUND BURIAL 9W
Pg. 10



GROUND BURIAL 18W
Pg. 11

FOUNTAIN NOZZEL LIGHTS



FOUNTAIN 15W
Pg. 12



FOUNTAIN 18W
Pg. 13



FOUNTAIN 24W
Pg. 14



FOUNTAIN 36W
Pg. 15

COB LIGHTS



COB RECESSED 12W
Pg. 16



COB RIMLESS 12W
Pg. 17



COB CYLINDER 20W
Pg. 18



LINEAR SPOT 20W
Pg. 19



COB RECESSED V2 12W
Pg. 20



COB ZOOM 40W
Pg. 21



COB SPOT 30W
Pg. 22

POWER SUPPLY



PHILIPS

24 V

4.5 AMP

24 V

6.5 AMP

24 V

8.8 AMP

24 V

14.5 AMP

24 V

18.8 AMP

24 V

25 AMP

12 V

8.5 AMP

12 V

12.5 AMP

12 V

29 AMP

12 V

50 AMP


7 INCH SURFACE SLIM EDITION Q



S10W7IPC



DIMENSION

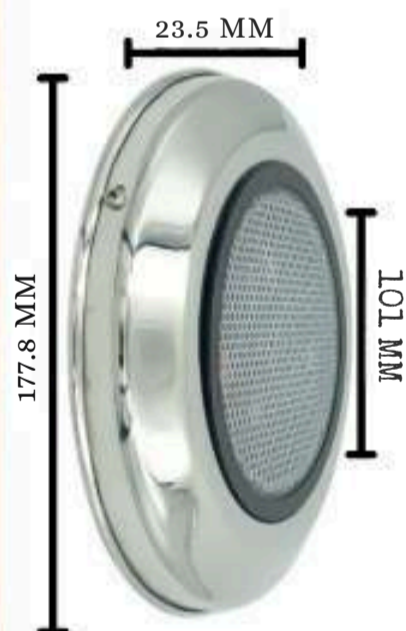

DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 20 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	1 METER
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER
FINISH:	BRUSH & CHROME FINISHED



SWIMMING POOL WALL MOUNTED LIGHT



7 INCH SURFACE SLIM EDITION 🔍



S20W7ISS



DIMENSION

DESCRIPTION



INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 24 WATT
INPUT VOLTAGE	12 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	1 METER
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT




4 INCH SURFACE SLIM EDITION 🔍



S10W4ISS



DIMENSION

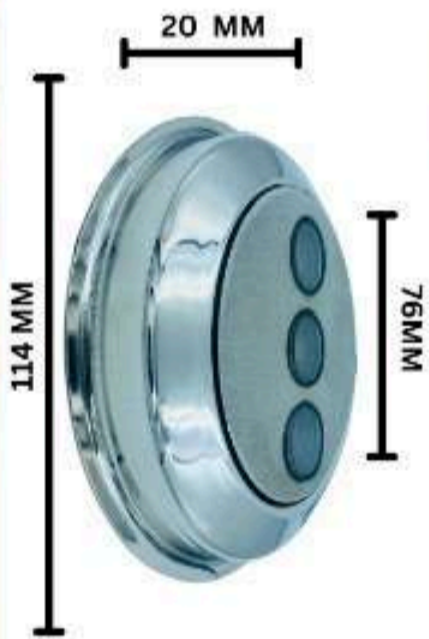

DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 12 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT



4 INCH SURFACE SLIM EDITION 🔍




S10W4IPC



DIMENSION

DESCRIPTION

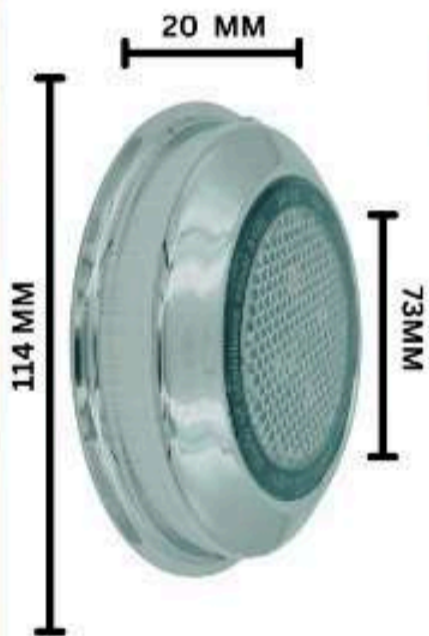

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 9 WATT
INPUT VOLTAGE	12 V
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	3000k
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	WARM WHITE
IP RATING :	- 68
WATER TEMP RATTING	-20 + 50 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT




3 INCH SURFACE SLIM EDITION 🔍



S3W3ISS



DIMENSION

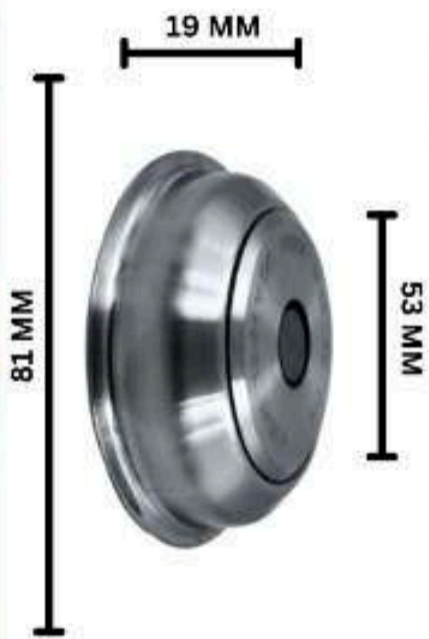

DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 3 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT



10 INCH SURFACE SLIM EDITION



S60W10ISS



DIMENSION

DESCRIPTION



INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 36 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT



10 INCH SURFACE SLIM EDITION



S36W10ISS



DIMENSION



DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 54 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

SWIMMING POOL WALL MOUNTED LIGHT



10 INCH SURFACE SLIM EDITION



S36W10IPC



DIMENSION

DESCRIPTION



INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 36 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN , SWIMMING POOL
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	25-45-60-90-120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER
FINISH:	BRUSH & CHROME FINISHED



sales@eltronindia.com

**CUSTOMIZATION AVAILABLE
YOU IMAGINE IT WE MAKE IT!!!**

GROUND BURIAL HEXA EDITION



UC3WHESH



DIMENSION




Also Available in
U-CLAMP Model



DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 3 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

U - CLAMP DELUXE EDITION

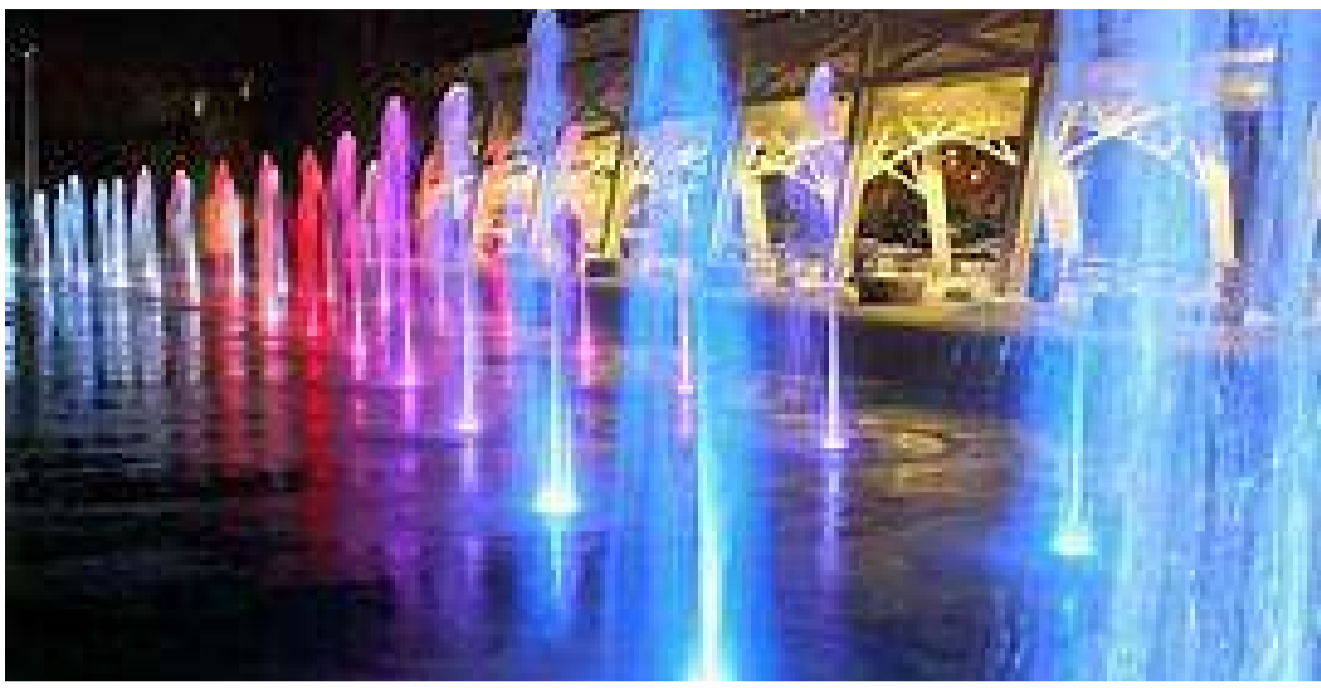


UC9WDESS



DIMENSION

DESCRIPTION

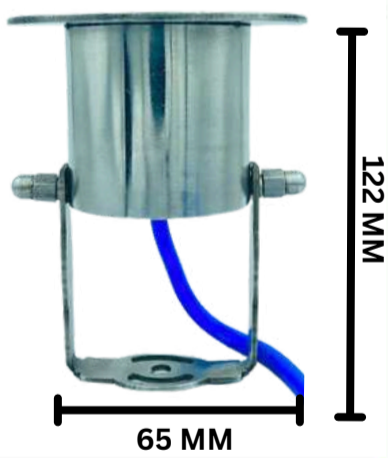


Also Available in Ground
Burial Model



INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 9 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

U - CLAMP DELUXE EDITION

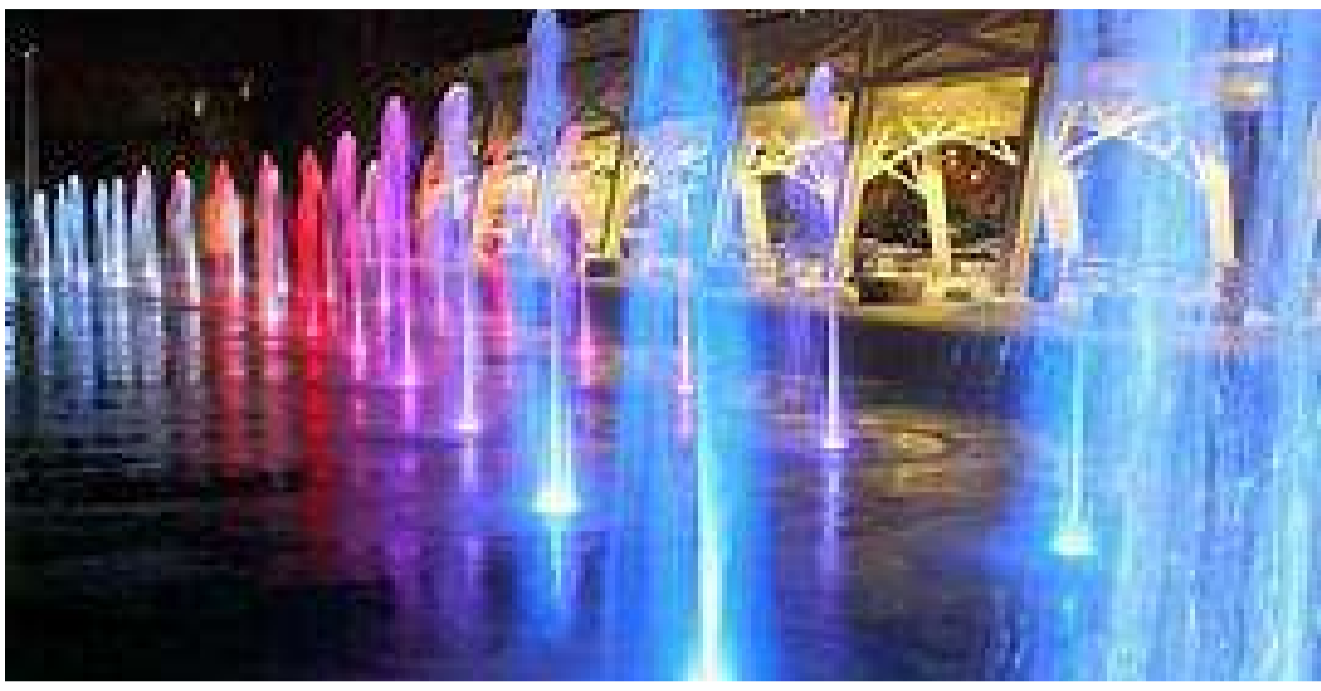


UC9WDESS



DIMENSION

DESCRIPTION

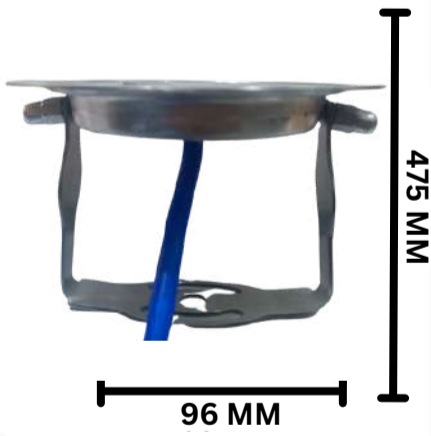

BACK SIDE



INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 15 WATT
INPUT VOLTAGE	12 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

U - CLAMP DELUXE EDITION



UC18WDESS



DIMENSION

DESCRIPTION



126 MM



84 MM


96 MM

Also Available in
U-CLAMP Model




INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 18 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

U - CLAMP DELUXE EDITION

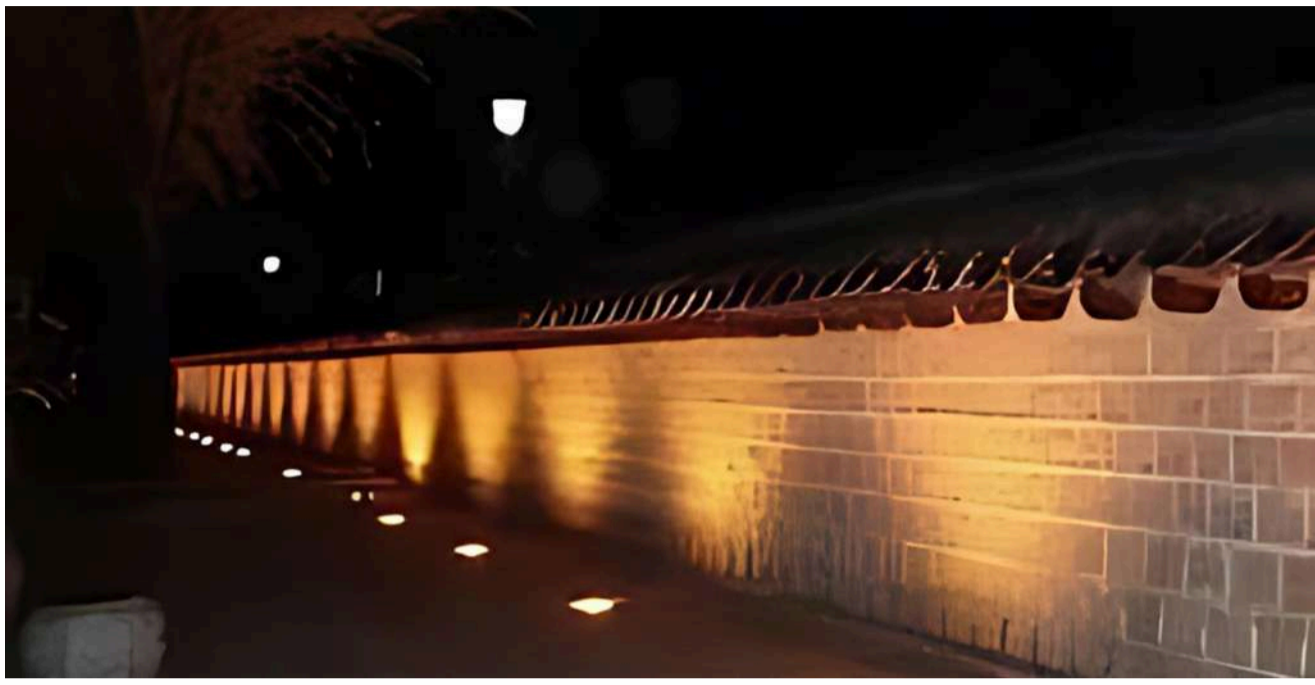

UC18WDESS

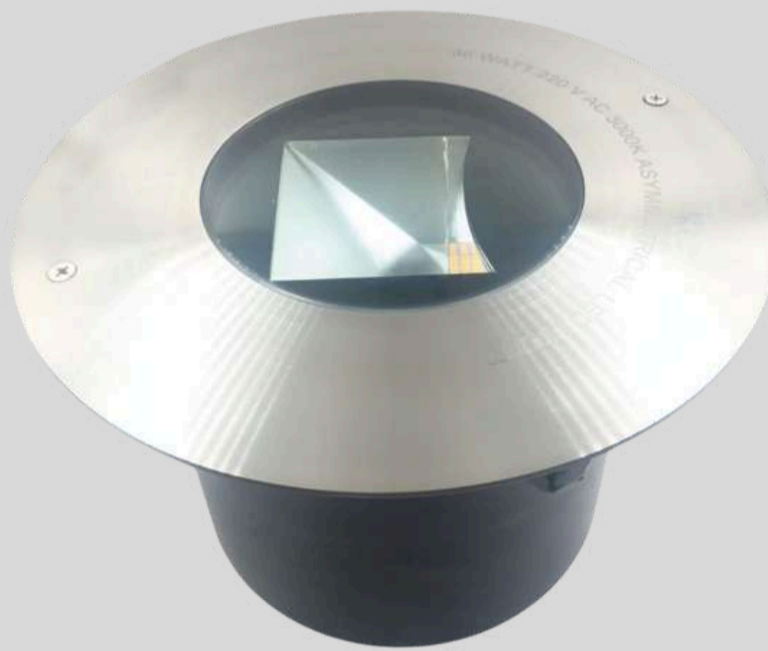


DIMENSION

DESCRIPTION




230MM

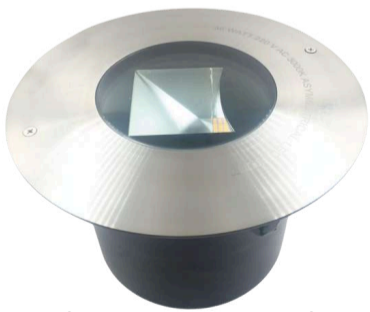

165MM

175MM

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 36 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

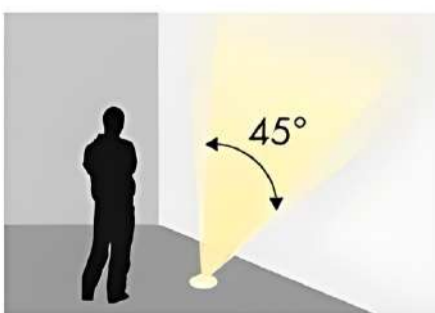


U - CLAMP DELUXE EDITION



UC24WLISS



DIMENSION

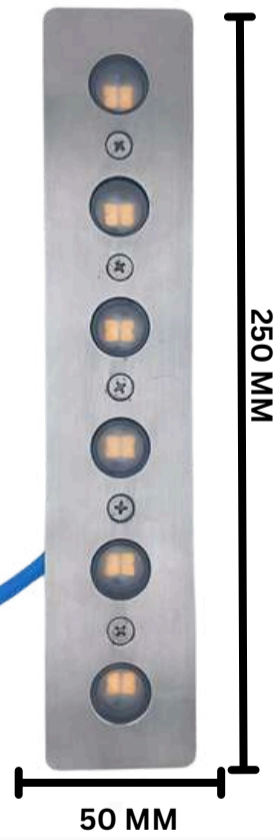


DESCRIPTION

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 24 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



FOUNTAIN LIGHTS SLIM EDITION 🔍

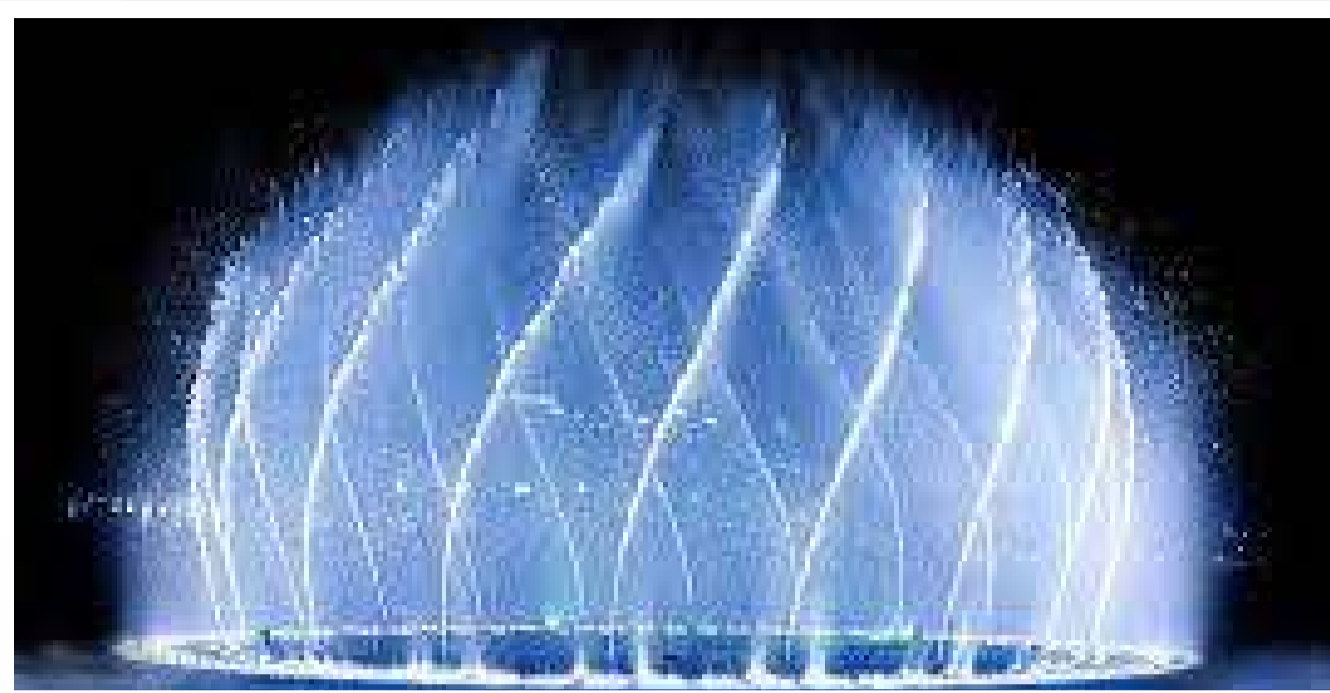


F12WSESS



DIMENSION

DESCRIPTION

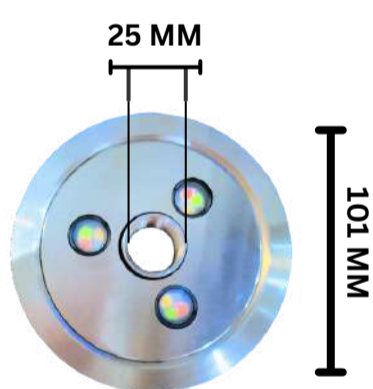

**NET WEIGHT:
360g**

INSTALLATION	NOZZLE MOUNTED
LIGHT SOURCE	LED 12 WATT
INPUT VOLTAGE	12 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	3000K
CABLE LENGTH	ONE METER
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	WHITE, RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-5 + 40 DEGREE
LIGHT ANGLE (LENS)	60°, 90°, 120°
INSTALLATION	NOZZEL MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL	
STAINLESS STEEL PLATE WITH PC CAP	
FINISH:	BRUSH & CHROME FINISHED

FOUNTAIN LIGHTS SLIM EDITION 🔍




F18WSESS



DIMENSION

DESCRIPTION

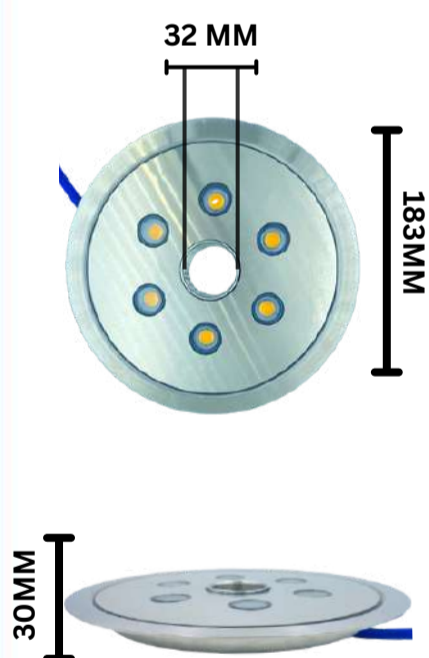

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 18 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



FOUNTAIN LIGHTS SLIM EDITION 🔍




F24WSESS




DIMENSION

DESCRIPTION

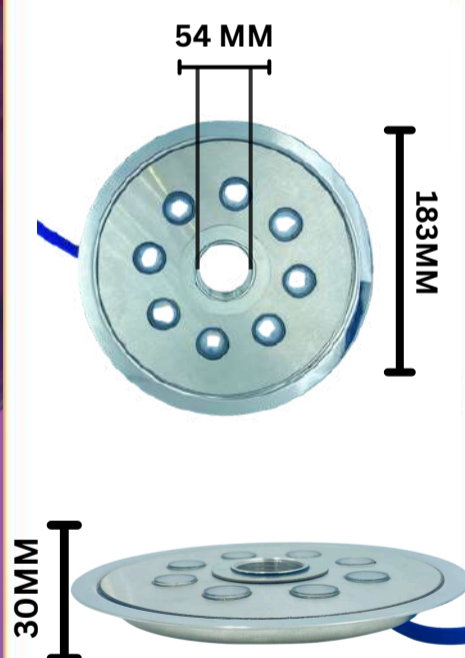

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 32 WATT
INPUT VOLTAGE	12 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	NOZZLE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED

FOUNTAIN LIGHTS SLIM EDITION 🔍

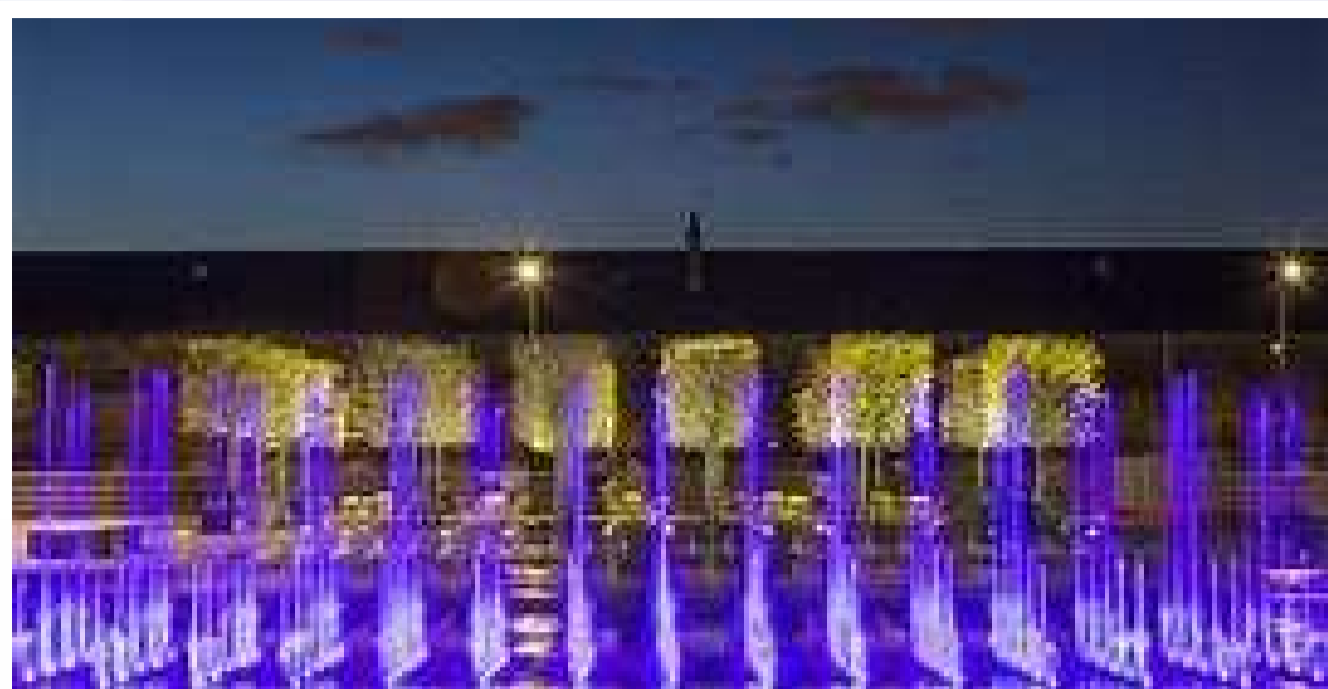


F42WSESS



DIMENSION


DESCRIPTION

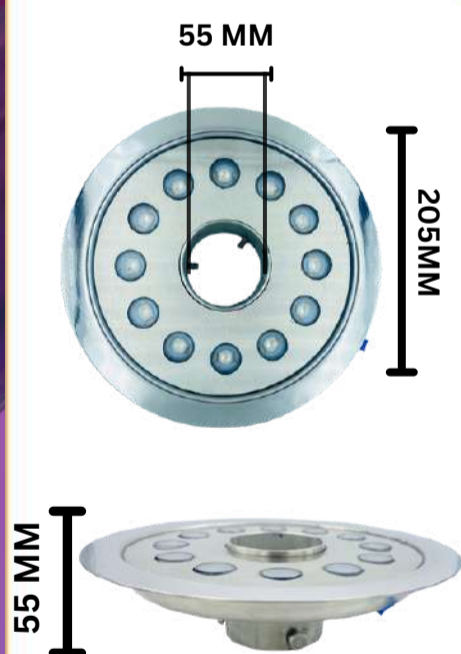

INSTALLATION	SURFACE MOUNTED
LIGHT SOURCE	LED 36 WATT
INPUT VOLTAGE	12 OR 24 V DC
LUMINOUS FLUX (SOURCE)	SMD LED
COLOR TEMPERATURE	2700-3100-5800
CABLE LENGTH	20"-40
SUITABLE FOR:	FOUNTAIN WATER BODY
AVAILABLE COLOR	RGB, BLUE, RGBW
IP RATING :	- 68
WATER TEMP RATTING	-20 + 40 DEGREE
LIGHT ANGLE (LENS)	120 DEGREE
INSTALLATION	SURFACE MOUNTED
OPERATING MODE	CONSTANT VOLTAGE
MADE OF STAINLES S STEEL 316L	
GLASS	PC COVER WITH SS PLATE
FINISH:	BRUSH & CHROME FINISHED



COB RECESSED COLORED REFLECTOR 🔍

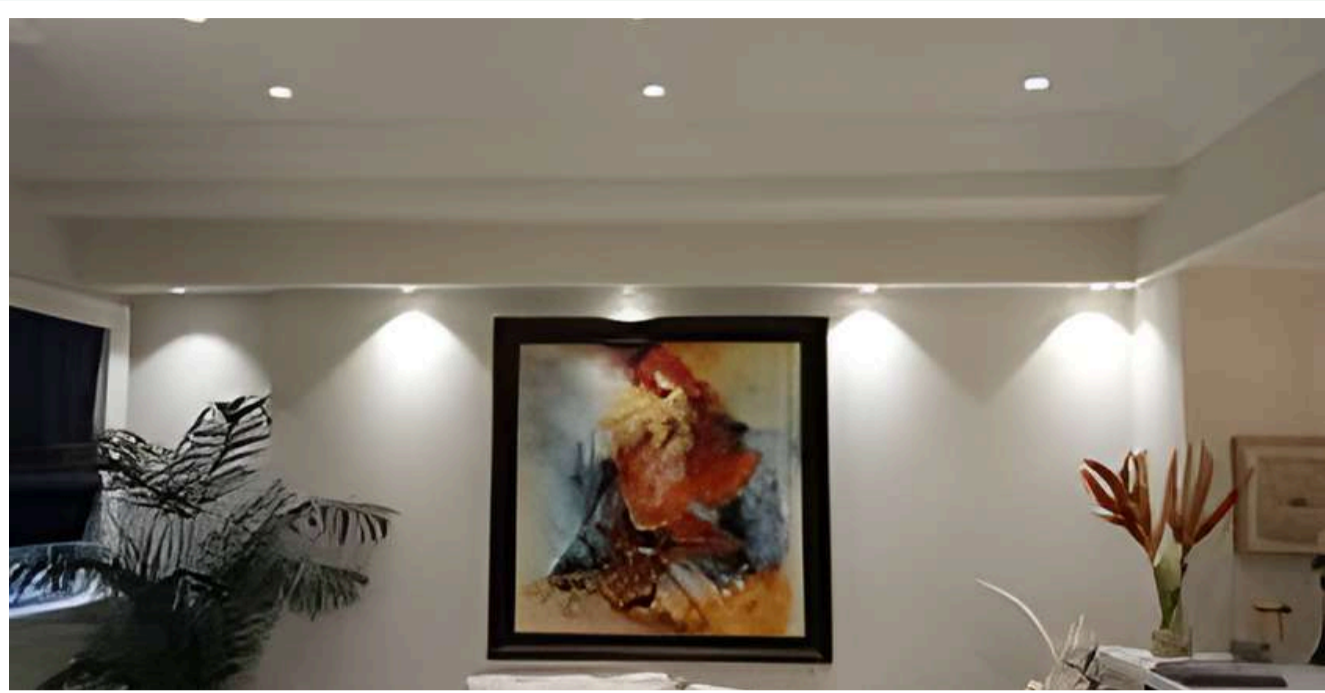

COBREF07-12



White + Rose Gold



White + Gun Metal



White + Matte Black



White + Chrome



White + Matt White



Black + Rose Gold



Black + Gun Metal



Black + Matte Black



Black + Chrome



Black + Matt White

Black + Rose Gold

Black + Gun Metal

Black + Matte Black

Black + Chrome

Black + Matt White

DISCRIPTION


ITEM	7W COB LIGHT	12W COB LIGHT
Model No	COBREF07	COBREF12
Power	7W	12W
Input Volt	90-265V	90-265V
OuteSize (mm)	65 x 60	85 x 76
Hole Size (mm)	Φ 55	Φ 75
COB Size	11mm	11mm
Material	Aluminum	Aluminum
CCT	2700-6500	2700-6500
Beam Angle	24°	24°

Body Colour
Black & White

DETACHABLE

TILTABLE

COB RECESSED - RIMLESS COLORED REFLECTOR

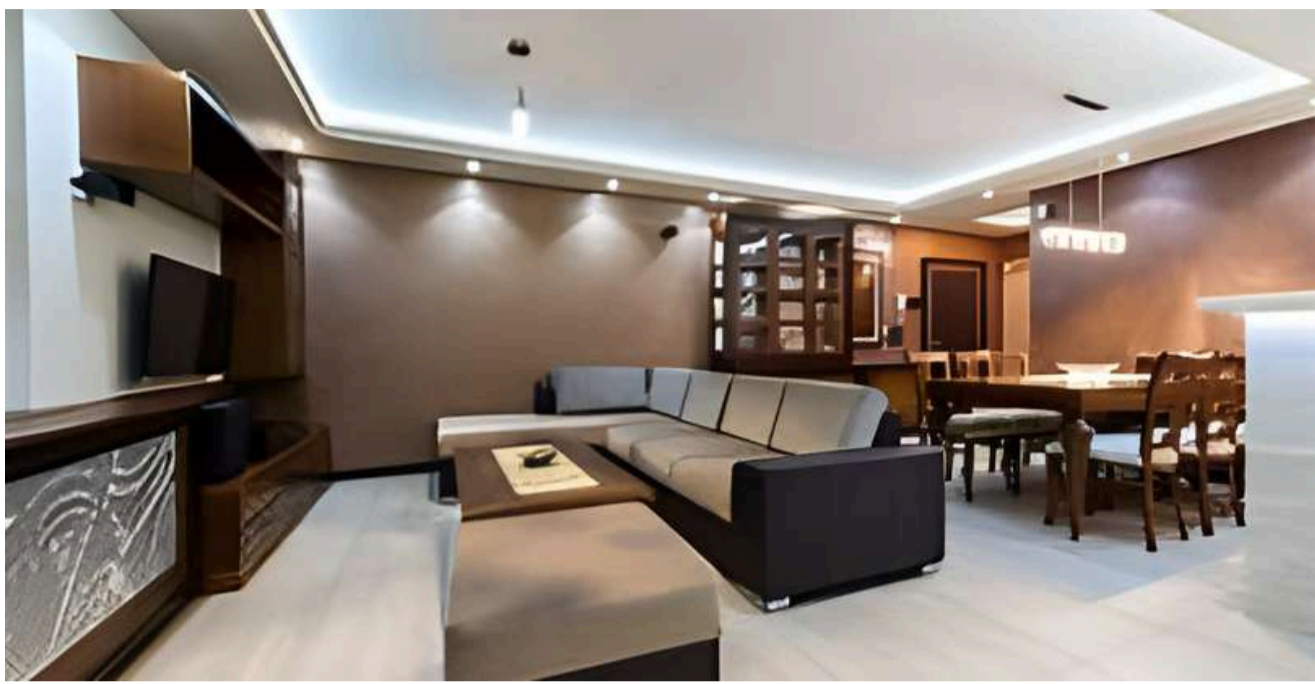

RILCOBREF07-12



All White



Gun Metal



Chrome



Rose Gold



Matt Black

CEILING



DISCRIPTION

ITEM	7W COB LIGHT	12W COB LIGHT
Model No	RILCOBREF07	RILCOBREF12
Power	7W	12W
Input Volt	90-265V	90-265V
OuteSize (mm)	81 x 70	101 x 85
Hole Size (mm)	Φ 55	Φ 75
COB Size	11mm	11mm
Material	Aluminum	Aluminum
CCT	2700-6500	2700-6500
Beam Angle	24°	24°

**ANTI
GLARE**

DETACHABLE

TILTABLE



COB SURFACE COLORED REFLECTOR



COBSMREF07 - 12 - 20



Rose Gold + White



Rose Gold + Black



Champagne Gold + White



Champagne Gold + Black

**ANTI
GLARE**

Body Colour
Black & White



Gun Metal + White



Gun Metal + Black



Chrome + White




Chrome + Black

DISCRIPTION

ITEM	7W SURFACE	12W SURFACE	20W SURFACE
Model No	COBSMREF07	COBSMREF12	COBSMREF20
Power	7W	12W	20W
Input Volt	90-265V	90-265V	90-265V
OuteSize (mm)	53 x 88	73 x 105	93 x 110
COB Size	11mm	11mm	11mm
Material	Aluminum	Aluminum	Aluminium
CCT	2700-6500	2700-6500	2700-6500
Beam Angle	24°	24°	24°

LINEAR SPOT LIGHT

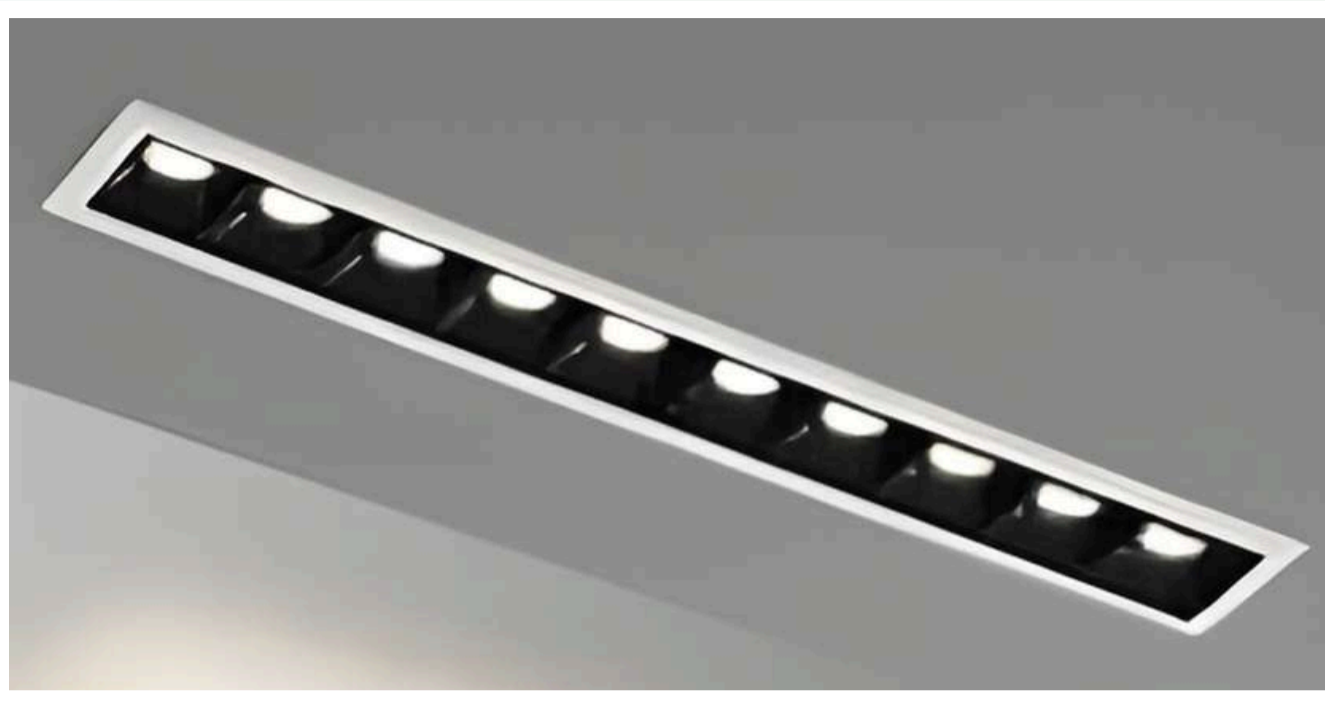

LINEARSPOT3-5-10



DISCRIPTION

ITEM	3 HEAD	5 HEAD	10 HEAD
Model No	LINEARSPOT3	LINEARSPOT5	LINEARSPOT10
Power	7W	12W	20W
Input Volt	90-265V	90-265V	90-265V
OuteSize (mm)	53 x 88	73 x 105	93 x 110
COB Size	11mm	11mm	11mm
Material	Aluminum	Aluminum	Aluminium
CCT	2700-6500	2700-6500	2700-6500
Beam Angle	24°	24°	24°

COB RECESSED



COBDL-WB07-12



DISCRIPTION

ITEM	7W COB LIGHT	12W COB LIGHT
Model No	COBDL-WB07	COBDL-WB12
Power	7W	12W
Input Volt	90-265V	90-265V
OuteSize (mm)	65 x 60	85 x 76
Hole Size (mm)	Φ 55	Φ 75
COB Size	11mm	11mm
Material	Aluminum	Aluminum
CCT	2700-6500	2700-6500
Beam Angle	24°	24°

Body Colour
Black & White

**ANTI
GLARE**

COB ZOOM



ZOOM12-20-30-40



DISCRIPTION

ITEM	12W ZOOM	20W ZOOM	30W ZOOM	40W ZOOM
Model No	ZOOM12	ZOOM20	ZOOM30	ZOOM40
Power	12W	20W	30W	40W
Input Volt	90-265V	90-265V	90-265V	90-265V
OuteSize (mm)	104 x 60	135 x 115	165 x 150	165 x 150
Hole Size	Φ 95	Φ 120	Φ 150	Φ 150
COB Size	11mm	11mm	17mm	17mm
Material	Aluminum	Aluminum	Aluminium	Aluminium
CCT	2700-6500	2700-6500	2700-6500	2700-6500
Beam Angle	24°	24°	36°	36°

Body Colour
Black & White

**ANTI
GLARE**

COB SPOT



COBSPOT03-05-10-15-30



DISCRIPTION

ITEM	3W SPOT	5W SPOT	10W SPOT	15W SPOT	30W SPOT
Model No	COBSPOT03	COBSPOT05	COBSPOT10	COBSPOT15	COBSPOT30
Power	3W	5W	10W	15W	30W
Input Volt	90-265V	90-265V	90-265V	90-265V	90-265V
OuteSize (mm)	68 x 50	85 x 65	110 x 70	135 x 80	160 x 110
Hole size	Φ 50	Φ 70	Φ 90	Φ 115	Φ 135
COB Size	11mm	11mm	11mm	11mm	17mm
Material	Aluminum	Aluminum	Aluminium	Aluminium	Aluminium
CCT	2700-6500	2700-6500	2700-6500	2700-6500	2700-6500
Beam Angle	24°	24°	24°	24°	24°

Body Colour
Black & White

